


**BIA-1
Remote Visual Alarm Panel**



The Western Innovator BIA-1 remote Visual alarm is designed to operate with a 24 VAC, 60 Hz power source. The alarm function is initiated on an open circuit. The alarm panel contains Red and Green alarm lights. The Green light remains illuminated while "service" bank is in use. When "service" bank is exhausted, the green light is extinguished. The red light is lighted and is activated to ensure notice of the alarm conditions. The Red alarm light will remain illuminated until the exhausted bank has been replaced.

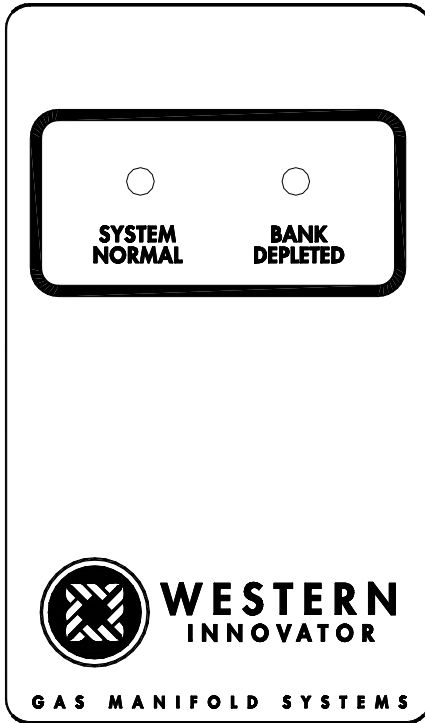

Features

- Exposed or flush mounting.
- Three optional installation configurations.
- Small compact design.

Specifications

- Dimensions: 4-3/4"H x 2-9/16"W x 5/8"D
- Power Requirements: 24 VAC, 60Hz
- Current Drain: System normal 80mA
Alarm condition 70mA

Manifold Power Supply

